

FIELDQUIP®

AG & TURF



APRIL 2025 RETAIL PRICE LIST

EFFECTIVE - 1st APRIL, 2025



DISCOVER THE DIFFERENCE AT FIELDQUIP

Fieldquip Pty Ltd is located in Oakey on the Darling Downs and is a member company of the global Alamo Group.

At Fieldquip we are dedicated to providing robust, innovative and market leading equipment for vegetation management, fine turf maintenance and lifestyle applications.

We pride ourselves in having the most comprehensive range of slashing and mowing implements in Australia.

Our range covers slashing/mowing implements from 4 feet to 30 feet wide, along with flail mowers, reach mowers, remote control mowers, pasture toppers, finishing mowers to list a few.

Fieldquip is also well known for its extensive range of professional fine turf maintenance equipment and quality lifestyle implements. Fieldquip commenced manufacturing in June 2004 and today, almost 20 years on, we are still manufacturing quality implements in Australia. Fieldquip became a member company of the Alamo Group from USA in April 2014. Along with our locally manufactured products we are now sourcing implements from our sister companies in the UK and USA significantly broadening our product offering.

MISSION...

Our mission is to provide quality implements that are reliable, value for money and exceed the expectations of tractor owners and operators throughout Australia and the South Pacific.

VISION...

For every tractor owner in Australia and the South Pacific to be the proud owner of at least one Fieldquip Implement.

WE TAKE RESPONSIBILITY FOR QUALITY...

Fieldquip implements and services will be "a cut above the rest". We will deliver excellence, strive for continuous improvement and respond vigorously to change. Each member of the team is responsible for the quality of whatever we do.

WE DELIVER CUSTOMER SATISFACTION...

We are dedicated to satisfying our customers. We believe in always respecting our customers, listening to their requests and understanding their expectations. We will strive to exceed their expectations in affordability, quality and on-time delivery.

WE PROVIDE LEADERSHIP AS A COMPANY AND AS INDIVIDUALS...

Fieldquip's leadership is founded on our diligent employees' abilities in effectively applying their training, innovativeness and business management skills. We add more value at lower cost with faster response. We each lead in our competence, creativity and teamwork.

WE ACT WITH INTEGRITY IN ALL WE DO...

We are all individually responsible for upholding utmost standards of behaviour, including honesty and fairness in all aspects of our work. We accomplish our commitments as responsible citizens and employees. We will consistently treat our customers, the community and company property with the respect they deserve.

WE VALUE FIELDQUIP AUSTRALIA PEOPLE...

We treat one another with high respect and mutually discuss, collaborate, listen and share information and ideas. We offer education and training needed to help our people grow in their knowledge and skill. We are committed to honesty and trust in all relationships.

WE CONSIDER OUR SUPPLIERS AS VITAL TEAM MEMBERS...

We owe our suppliers the same respect that we show to our customers. Our suppliers deserve fair and reasonable treatment, clear agreements and honest feedback on their performance and support. We consider for our suppliers' requirements in conducting all aspects of our business.



FIELDQUIP®
AG & TURF



SINGLE ROTOR SLASHERS	2
-----------------------	---

MULTI SPINDLE SLASHERS/MULCHERS	5
---------------------------------	---

FLEX WING SLASHERS	8
--------------------	---

OUTFRONT FLAIL MOWERS	16
-----------------------	----

FINISHING MOWERS	17
------------------	----

MULTI DECK FINISHING MOWERS	22
-----------------------------	----

PASTURE TOPPERS	23
-----------------	----

RADIO CONTROL MOWERS	24
----------------------	----

VERGE MOWERS	26
--------------	----

REACH MOWERS	27
--------------	----

POST HOLE DIGGERS	28
-------------------	----

TILLERS	29
---------	----

CULTIVATORS	29
-------------	----

GRADER BLADES	30
---------------	----

LIFESTYLE IMPLEMENTS	32
----------------------	----

SABRE SERIES SLASHERS



- Suits 18 - 40HP tractors.
- SABRE range of offsettable rotary slashers.
- 5 mm galvanised deck.
- Cat I.
- Adjustable skids.
- Floating top link.
- PTO driveshaft.
- Friction clutch.
- Front and rear chain guards.
- Gearbox available in red or yellow.



**SABRE 1500
SHOWN WITH
STANDARD FEATURES**

Model	Overall Width	Cutting Width	Weight	HP (Min.)	RRP ex GST	RRP inc GST
SBR12-500	1.2m	1.1 m (3'6")	180	18	\$2,998	\$3,297
SBR15-500	1.5 m	1.4 m (4'6")	250	20	\$3,295	\$3,624
SBR18-500	1.87 m	1.8 m (6')	295	30	\$4,373	\$4,810

PART NUM	OPTION DESCRIPTION	RRP EX. GST	RRP INC. GST
B9164	Combination Friction and Overrun Clutch	\$428	\$471
AN105	50 HP Gearbox Option (50 HP standard on SBR18-500)	\$512	\$563
SBR-WHKT	Wheelkit (adjustable) Suitable for all Sabre Models.....	\$688	\$756



LE SERIES 75HP SLASHERS



- Suits 30 - 75 HP tractors.
- 5mm galvanised deck.
- Cat I & II.
- Adjustable skids.
- Pivoting headstock with chain backstays.
- PTO driveshaft.
- Friction clutch.
- Front and rear chain guards.
- Gearbox available in red or yellow.
Other colours available on request.



LE-80 SHOWN
WITH STANDARD FEATURES


Model	Working Width	Weight	HP (Min.)	Finish	RRP ex GST	RRP inc GST
LE50-920	1.2 m (4')	285	30	Galvanised Deck	\$5,495	\$6,044
LE60-920	1.5 m (5')	350	40	Galvanised Deck	\$5,715	\$6,286
LE70-920	1.8 m (6')	420	45	Galvanised Deck	\$6,155	\$6,770
LE80-920	2.0 m (6'8")	500	50	Galvanised Deck	\$7,695	\$8,464

PART NUM	OPTION DESCRIPTION	RRP EX. GST	RRP INC. GST
B7250	Combination Friction and Overrun Clutch	\$633	\$696
WHA-600	Wheelkit (adjustable) Suitable for LE/XLE60	\$1,205	\$1,325
WHA-610	Wheelkit (adjustable) Suitable for LE/XLE70	\$1,205	\$1,325
WHA-620	Wheelkit (adjustable) Suitable for LE/XLE80	\$1,205	\$1,325

XLE SERIES 100HP SLASHERS



- Suits 60 - 100 HP tractors.
- 5mm galvanised deck.
- Cat I & II.
- Adjustable skids.
- Pivoting headstock with chain backstays.
- PTO driveshaft.
- Friction clutch.
- Front and rear chain guards.
- Gearbox available in red or yellow.
Other colours available on request.

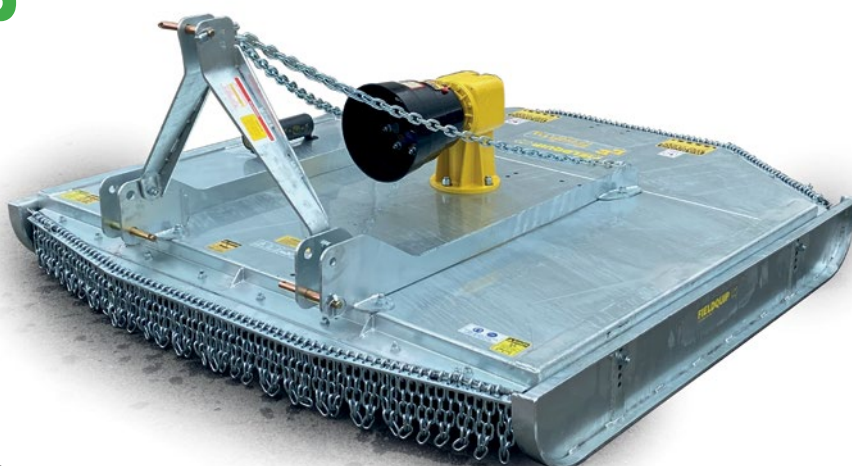


XLE SHOWN WITH
STANDARD FEATURES

Model	Working Width	Weight	HP (Min.)	Finish	RRP ex GST	RRP inc GST
XLE60-920	1.5 m (5')	360	60	Galvanised Deck	\$6,190	\$6,809
XLE70-920	1.8 m (6')	430	60	Galvanised Deck	\$6,715	\$7,386
XLE80-920	2.0 m (6'8")	510	60	Galvanised Deck	\$8,290	\$9,119

XHD SERIES SLASHERS



- 150HP 540 RPM high-speed gearbox.
- Multi-plate, asbestos free, brass impregnated friction clutch.
- Heavy duty monocoque pressed 6 mm deck plate.
- Clean body lines to minimise grass build up.
- Hot dipped galvanised deck.
- Pivoting headstock with chain backstays.
- Adjustable height, high clearance skids.
- Heavy duty spring steel blade carrier.
- Heavy duty swing back lift blades.
- Front and rear chain guards.
- Adjustable height castor wheels:
 - Single 500 x 10 monofill adjustable height castor wheels for XHD72.
 - Twin 500 x 10 monofill adjustable height castor wheels for XHD84.

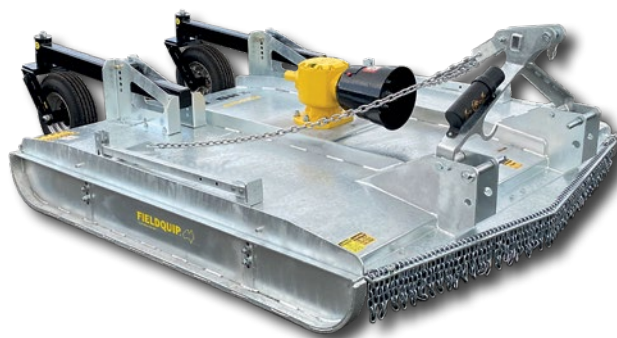

XHD84 SHOWN WITH ALL STANDARD FEATURES

- Painted components finished in high quality durable two pack polyurethane.
- Painted components available in red or green. Other colours available on request.

Model	Working Width	Weight	HP (Min.)	Finish	RRP ex GST	RRP inc GST
XHD72	1.8 m (6')	700	50	Galvanised Deck	\$15,010	\$16,511
XHD84	2.15 m (7')	880	70	Galvanised Deck	\$18,020	\$19,822

PART NUM	OPTION DESCRIPTION	RRP EX. GST	RRP INC. GST
T1-110	Sign Rack (complete with 4 signs)	\$2,145	\$2,360
TM-TB600	Tool Box	\$1,425	\$1,567
HYDFAN	Hydraulic Fan	\$5,797	\$6,377
RL-001	Rear Lights	\$534	\$587
S07498	Extra wheel kit for XHD72	\$1,485	\$1,634

LCL SERIES SIDE THROW ORCHARD MOWER



- TPL Cat I and II.
- Available in 1.8 m, 2.1 m.
- Flex Tower.
- Heavy duty rear castor.
- Ideal for orchards.

The LCL Series side discharge rotary slasher is a must have in every orchard. The LCL Series directs the grass clippings easily and efficiently under the tree line. Many orchardists have proved that depositing grass clippings under the trees aids in moisture retention and establishment of good bacteria. This in turn can help in the health of the trees and thus increase the yield.

The LCL6 comes standard with a 75hp gearbox and the LCL7 is standard with a 100hp gearbox. The LCL Series has a heavy duty 5mm galvanised deck construction, heavy duty floating A-frame, friction clutch, adjustable side shoot, two front adjustable rollers and a single adjustable tail wheel.

This is a truly robust side discharge slasher and is available in 1.8 m and 2.1 m cutting widths.



LCL7

Model	Working Width	Weight	Gearbox Rating	HP (Min.)	RRP ex GST	RRP inc GST
LCL6 - S09714	1.8 m (6')	650 kg	75hp	65	\$18,695	\$20,564
LCL7 - S06654	2.15 m (7')	750 kg	100hp	75	\$19,245	\$21,169


PART NUM	OPTION DESCRIPTION	RRP EX. GST	RRP INC. GST
S08523	Extra wheel kit to suit LCL6 (LCL7 standard with two wheels)	\$1,205	\$1,325

Photos may contain optional extras. All prices are ex-works (Oakey Qld). Prices and specifications may change without notice.

GEARMOWER SERIES SLASHERS

HEAVY DUTY 3 ROTOR SLASHERS

- Gear drive rear discharge slasher.
- Cat I & II.
- Adjustable skids.
- PTO driveshaft.
- Multi plate asbestos free brass impregnated friction clutch.
- GM300-900 – Heavy duty monocoque pressed 6 mm deck plate.
- GM36-900 – Heavy duty monocoque pressed 8 mm deck plate.
- Clean body lines to minimise grass build up.
- Pivoting headstock with chain backstays.
- Adjustable height high clearance skids.
- Extra heavy duty spring steel laminated blade carrier.
- Heavy duty swing back heat treated lift blades.
- Front and rear chain guards.
- Twin heavy duty adjustable height rear castor wheels.
- Galvanised deck standard.
- Painted components available in red or green. Other colours available on request.

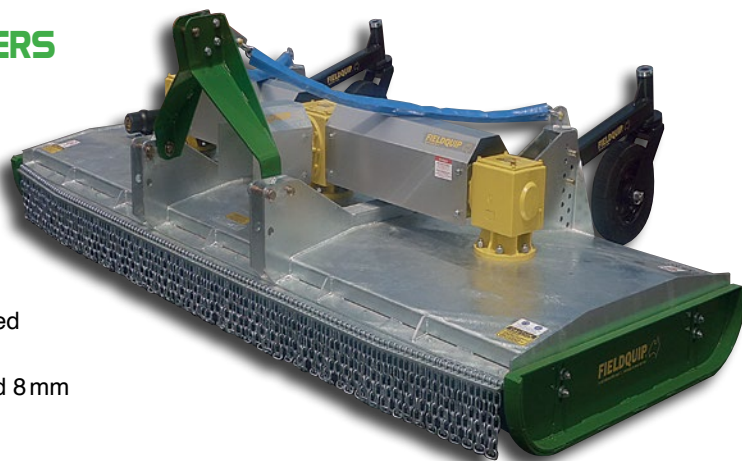

GEARMOWER GM30-900




Model	Gearbox Rating	Working Width	HP (Min.)	RRP ex GST	RRP inc GST
GM30-900	150HP	3.0 m (10')	75	\$29,390	\$32,328
GM30-900S c/w side discharge and 4 castors	150HP	3.0 m (10')	75	\$41,948	\$46,142
GM36-900	150 HP	3.6 m (12')	100	\$31,469	\$34,615
GM36-900S c/w side discharge and 4 castors	150 HP	3.6 m (12')	100	\$45,098	\$49,607

PART NUM	OPTION DESCRIPTION	RRP EX. GST	RRP INC. GST
	Mulching Option - standard blade carrier double stacked fitted with 2 stepped and 2 straight blades per rotor add	\$1045/rotor	1,149 /rotor
	1000 RPM upgrade for Gearmower Series.....	\$1565	\$1,721



Photos may contain optional extras. All prices are ex-works (Oakey Qld). Prices and specifications may change without notice.

CYCLONE RANGE ROTARY SLASHER/MULCHER (WITH REAR ROLLER)

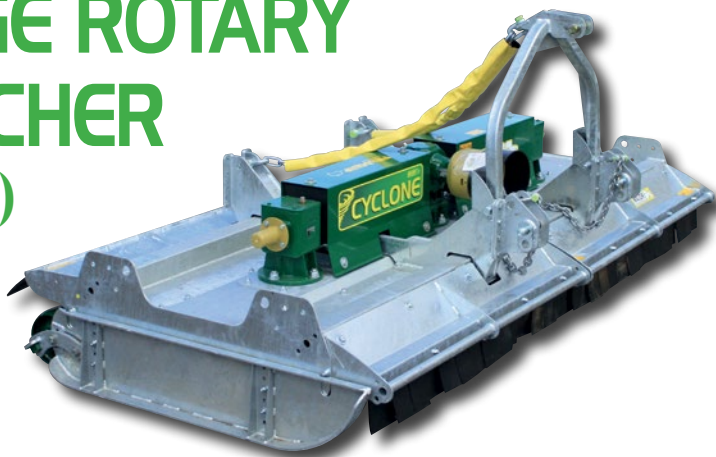

The award winning range of Cyclone Mowers has been designed to do the work of a flail mower but requires a fraction of the power and fuel that a flail mower would consume.

These machines are strong, rugged and robust; specifically designed for use in set-aside, forestry margin management and sensitive environmental scrubland control. This machine easily copes with the toughest of conditions including shrub, saplings, gorse and brush. The Major Cyclone is ideal for maintenance of solar farms, pasture topping, managing crop stubble and many other general slashing applications.

Strenx™ 700 MC high-strength steel is used in the manufacture of these machines. This material is stronger than steel traditionally used in machinery manufacturing. The undersole discs are produced from Hardox® 450, a wear and abrasion resistant steel.

- Can be front or rear mounted (to be specified when ordering).
- Patented 'blender' double chop blade system.
- 25% less power and fuel consumption required than a similar sized flail machine.
- Impact shock reducing swinging hardened spring steel blades.
- Low maintenance machine with less wearing parts than a flail mower.
- Heavy duty rear roller.

Model	Working Width	Weight	HP	PTO rpm	Rotors	RRP ex GST	RRP incl GST
MJ30-200	2.0m (6'5")	600 kg	50-100	540/1000	3	\$22,838	\$25,121
MJ31-250	2.50m (8'1")	785 kg	70-120	540/1000	4	\$26,245	\$28,869
MJ31-280	2.80m (9'2")	945 kg	80-120	540/1000	4	\$27,248	\$29,972
MJ30-420 (Single Wing)	4.2m (13'9")	1265 kg	100-150	540/1000	6	\$47,870	\$52,656
MJ30-420 DW (Double Wing)	4.2m (13'9")	1265 kg	100-150	540/1000	6	\$59,588	\$65,546
MJ30-560	5.60m (18'4")	1680 kg	110-150	1000	8	\$73,495	\$80,844
MJ30-630	6.30m (20'8")	1875 kg	140-190	1000	9	\$77,690	\$85,458
MJ30-720	7.20m (23'6")	2235 kg	150-210	1000	10	\$99,173	\$109,090
MJ30-920 standard with front mounted wheels and full width rollers on the rear	9.0m (29'5")	3099 kg	180-250	1000	10	\$152,250	\$167,475



CS PRO COMPACT TWIN ROTOR SLASHERS

- Unique blade system for maximum mulching and shredding
- Low maintenance machine with less wearing parts than a flail mower
- Heavy duty full-length rear roller
- Can be front or rear mounted (to be specified when ordering)
- Multi-purpose mower; ideal for everyday turf maintenance, heavy scrub and stubble management, hedgerow undergrowth



The MAJOR CS Pro is a multi-purpose mower, designed for the maintenance of dense vegetation, long grass and estate lawns and fine turf. The patented double-chop blade system requires less HP than a comparable width flail mower. High-performance Strenx™ 700 MC structural steel makes these mowers strong and ensures a long wear life.

Model	Working Width	Weight	HP	Rotors	RRP ex GST	RRP incl GST
MJ65-150	1.45 m (4'9")	290 kg	20	2	\$14,695	\$16,164

CYCLONE RANGE ROTARY SLASHER/MULCHER

(with rear wheels in lieu of rollers, recommended for Macadamia Plantations only. Please refer to page 5 for MAJOR CYCLONES suitable for general slashing/mowing, pasture management and stubble mulching applications)

The MJ30-420DWW Cyclone has been designed especially for the macadamia industry. The twin wing centrally mounted 4.2m Cyclone complete with rear wheels is the result of many farm visits, trials and listening to growers needs.

Macadamia growers were after a robust three point linkage, folding wing mulching slasher. Furthermore they needed rear castor wheels in lieu of rollers so they can mow and not press the valuable macadamias into the ground. The award-winning Cyclone mower ticks all the boxes as well as offering durability, reliability and efficiency.

Longevity is another great feature of the Cyclone having been manufactured from Stenx™ 700 MC high strength steel.

These rotary slasher/mulchers are designed for the most rugged working environments offering reduced power consumption and maintenance when compared with traditional flail mulchers.



Model	Working Width	Weight	HP	PTO rpm	Rotors	RRP ex GST	RRP incl GST
MJ30-420 WRW (Double Wing)	4.20 m (13'9")	1265 kg	100-150	540/1000	6	\$65,930	\$72,522
MJ30-560 WRW	5.60 m (18'4")	1680 kg	110-150	540/1000	8	\$80,745	\$88,820
MJ30-630 WRW	6.30 m (20'6")	1875 kg	140-190	540/1000	9	\$83,475	\$91,823
MJ30-720 WRW	7.20 m (23'6")	2235 kg	150-210	540/1000	10	\$108,675	\$119,543

PART NUM	OPTION DESCRIPTION	RRP EX. GST	RRP INC. GST
CYC-CW-WGKIT	Wheelkit mounted to front of LH and RH wing	\$6,563	\$7,219

RHINO TS SERIES FLEX WING SLASHERS

- Equal angle pivoting tongue and direct acting suspension system for uneven terrain.
- Designed for tractors with 35 - 60 PTO HP.
- Short turning radius for small areas.
- 38mm cutting capacity.
- Smooth decks for easy cleaning and unobstructed underside for airflow through the high volume cutting chamber.
- Low tongue weight for smaller horsepower tractor applications.
- Provides dramatic reduction in mowing time compared to most rigid deck cutters.
- Unique "wing-bar" blade carrier protects the gearbox output shaft with minimal weight.
- Large center section skid shoes and tapered wing shoes provide anti-scalping protection.
- Designed for 540 RPM PTO tractors.
- Chain guards included for protection.



Model	Working Width	Weight	HP (Min.)	Finish	RRP ex GST	RRP inc GST
RHTS12	3.6 m (12')	1247 kg	35	Orange Powder Coat	\$41,499	\$45,648



RHINO 2000 SERIES FLEX WING SLASHERS

- Smooth Top and Bottom Deck Design with Dual Cut Chambers
- New Composite Divider Shield
- Mechanical Level Lift
- Infinity Cast Carrier Utilizing Many of the Same Drivetrain Components as the 3150
- New Improved Tongue Design Featuring Standard Clevis
- CAT 5 CV Main and CAT 4 Wing Drivelines
- Coil Spring Suspension



- Equip Your 2000 Series with Rhino Trax
- LED Lights are Standard Equipment

Model	Working Width	Weight	HP (Min.)	Finish	RRP ex GST	RRP inc GST
RH2150	4.5 m (15')	1946 kg	50	Orange Powder Coat	\$53,499	\$58,848

RHINO EPIC 4125 SERIES FLEX WING SLASHERS

- Heavy-duty 3.8m (12 1/2') commercial-grade rotary cutter Ideal for commercial mowing, heavy-duty agriculture use, roadsides and firebreaks etc.
- Heavy-duty wing pivot hinges engineered to take the daily stresses of the job
- 4" cutting capacity ensures you can make short work of prunings and regrowth
- Designed for tractors with 50 - 160 PTO HP
- Massive, replaceable skid shoes protect the underside of the slasher
- Independent axle suspension delivers a smoother ride and reduces wear and tear
- Optional Orchard Package available to protect low-lying branches from catching in the hydraulic cylinders
- (Image below shows the 4125 fitted with optional Orchard Package)

Model	Working Width	Weight	HP (Min.)	Finish	RRP ex GST	RRP inc GST
RH4125	3.7 m (12'5)	1815 kg	50	Powder Coat	\$59,999	\$65,998



RHINO APEX 3150 SERIES FLEX WING SLASHERS



- 4.5m (15') cutting widths.
- 160 HP gearboxes.
- Farm use.
- General mowing.
- Pasture maintenance.
- Roadside mowing.
- Shredding stalks.
- Smooth top design for easy cleaning of deck.
- Standard 540 RPM (1000 RPM available).

Model	Working Width	Weight	HP (Min.)	Finish	RRP ex GST	RRP inc GST
RH3150	4.5m (15')	2355kg	50	Orange Powder Coat	\$72,599	\$79,858

STANDARD FEATURES -



UNIQUE BLADE PAN CARRIER

Strong and durable stump jumper. Creates excellent air flow.



LED LIGHT KIT

State of the art LED's are incorporated into a sleek highly durable housing that will provide years of trouble free protection and safety.



PIVOT HITCH

Unique locking clevis device for ease of hooking up.



SMOOTH DOME DECK

Less clutter, easy to clean with larger cutting chamber.



INDEPENDENT SUSPENSION

Simple, no moving parts.



SAFETY COVER

Quick access for easy maintenance.

RHINO EPIC 4150 SERIES FLEX WING SLASHERS

- 250HP gearboxes.
- 4.5m (15') cutting widths.
- Suitable for clearing brush up to 100 mm in diameter.
- Commercial mowing.
- Farm use.
- General mowing.
- Heavy-duty agricultural use.
- Industrial mowing.
- Pasture maintenance.
- Right-of-way mowing.
- Roadside mowing.
- Shredding crops.
- Shredding stalks.
- Smooth top design.
- 4.5mm deck thickness.
- Standard 540 RPM (1000 RPM available)

EXTRA DUTY

- 250HP GEARBOXES
- 4.5MM DECK THICKNESS



Model	Working Width	Weight	HP (Min.)	Finish	RRP ex GST	RRP inc GST
RH4150	4.5m (15')	2447kg	60	Orange Powder Coat	\$76,469	\$84,115

STANDARD FEATURES -



UNIQUE BLADE PAN CARRIER

Strong and durable stump jumper. Creates excellent air flow.



LED LIGHT KIT

State of the art LED's are incorporated into a sleek highly durable housing that will provide years of trouble free protection and safety.



PIVOT HITCH

Unique locking clevis device for ease of hooking up.



SMOOTH DOME DECK

Less clutter, easy to clean with larger cutting chamber.



INDEPENDENT SUSPENSION

Simple, no moving parts.



SAFETY COVER

Quick access for easy maintenance.

MULTICUT 420

3PL FLEX WING SLASHERS

The Spearhead Multicut 420 is a 3-point linkage mounted slasher ideal for use with tractors of 80hp and above. Sitting perfectly between the fixed and trailed mowing units available on today's market, the Spearhead Multicut 420 gives added versatility alongside a host of innovative features.

A 100hp heavy-duty driveline operating at 1000rpm fitted with three rotors with three blades per rotor operating at over 80 metres per second as standard give effortless cutting power in intense working conditions.

A delta style construction allows for a smooth throughput of material in and out of the slasher combined with a floating linkage to leave a perfect working image even in very rough terrain. Each wheel arms on the slasher features a heavy duty industrial wheel and tyre and can be quickly adjusted making it easy to adjust the cutting height in the field.

- 4.45 metre cutting width
- 80hp minimum tractor power requirement
- Slip clutch protection
- Flexwing (3 point linkage mounted)

Model	Working Width	Weight	HP (Min.)	Rotors	RRP ex GST	RRP inc GST
SPH-MC420 (1000RPM)	4.45m (14' 7")	1875 kg	80	3	\$42,900	\$47,190



Photos may contain optional extras. All prices are ex-works (Oakey Qld). Prices and specifications may change without notice.

MULTICUT 480

FLEX WING SLASHERS

The Multicut 480 has an award winning heritage of reliability and performance that sets it apart from the rest. Each rotor carries three high-lift swinging blades to provide an exceptionally clean cut and even spread of material.

The robust, spring steel blades will produce a fine finish on amenity parkland and paddocks or cut and mulch heavy set-aside and light scrub with ease.

The durability designed into this mower makes it the first choice of intensive users throughout the world where reliability is paramount.

- 4.6 metre cutting width
- 70hp minimum tractor power requirement
- Heavy duty 250hp input gearbox
- Heavy duty 116 hp and 111 hp rotor gearboxes
- Slip clutch protection
- 8 pneumatic rear wheels
- Anti-scalp rotor protection dishes
- 15 x heavy duty cutting blades (3 per rotor standard, can be optioned up to 6 per rotor)
- Floating wings
- Rear lighting kit

Model	Working Width	Weight	HP (Min.)	Rotors	RRP ex GST	RRP inc GST
SPH-MC480 (1000RPM)	4.6m (15'1")	2310 kg	70	3	\$67,950	\$74,745

PART NUM	OPTION DESCRIPTION	RRP EX. GST	RRP INC. GST
046001MK	Mulching Kit, 3 extra blades per rotor	\$1,570	\$1,727



MULTICUT 650

FLEX WING SLASHERS

The extra output Multicut 650 folding wing mower sets the standards in cutting performance with a total of 15 heavy duty cutting blades as standard ensuring the finest chop in fine grasses through to light scrub.

The evenness of spread from the five rotors is unrivalled leaving a clean finish and high output unmatched by competitive three rotor machines of the same width.

With a six gearbox driveline, each with slip clutch protection, the power is evenly spread to deliver exceptional reliability and durability. The high output 6.2 metre cutting width enables over 6 hectares per hour to be cleared and the compact 2.8 metre transport width ensures that transport between sites is safe and efficient.

- 6.2 metre cutting width
- 90hp minimum tractor power requirement
- Heavy duty 250hp input gearbox
- Heavy duty 116hp and 111hp rotor gearboxes
- Slip clutch protection
- 8 pneumatic rear wheels
- Anti-scalp rotor protection dishes
- 30 x heavy duty cutting blades (6 per rotor)
- Floating wings
- Rear lighting kit

Model	Working Width	Weight	HP (Min.)	Rotors	RRP ex GST	RRP inc GST
SPH-MC650	6.2m (20'4")	2850 kg	90	5	\$88,900	\$97,790



MULTICUT 820

FLEX WING SLASHERS

When it comes to performance the high output Multicut 820 will go way beyond your expectations delivering a massive 8.2 metres of cutting width to effectively eat your way through the workload.

Match the Multicut 820 with a powerful tractor and output upwards of 90 hectares per day is achievable.

The Multicut 820 is robust in construction like its smaller Multicut 620 and Multicut 460 siblings, and in addition is also configured with full width walking axles and hydragas suspension to reduce shock loading. Featuring a six gearbox driveline, each with slip clutch protection, the power is evenly spread to deliver exceptional reliability and durability across the full cutting width.

- 8.2 metre cutting width
- 150hp minimum tractor power requirement
- Heavy duty 250hp input gearbox
- Heavy duty 141hp and 111hp rotor gearboxes
- Slip clutch protection
- 8 pneumatic rear wheels
- Anti-scalp rotor protection dishes
- 30 x heavy duty cutting blades (6 per rotor)
- Floating wings
- Rear lighting kit

Model	Working Width	Weight	HP (Min.)	Rotors	RRP ex GST	RRP inc GST
SPH-MC820	8.2m (26'11")	4330 kg	150	5	\$115,750	\$127,325




OUTFRONT SERIES FLAIL MOWERS

With its compact design and fitting options to fit a wide range of front mower manufacturers with two-point linkage, Spearhead's Outfront flail mower is the perfect machine for councils and contractors.

This compact machine creates a consistent quality finish in material up to 30mm in diameter thanks to its spiral rotor design. The Outfront 160 has a 1.6m cutting width and is fitted with standard fitment heavy-duty hammer flails. Finish is further enhanced thanks to a 4 1/2" rear roller.

The machine features a three belt drive transmission, easy to adjust height setting and front guide wheels — all combined to give all day long operating reliability and ease of use to the operator.

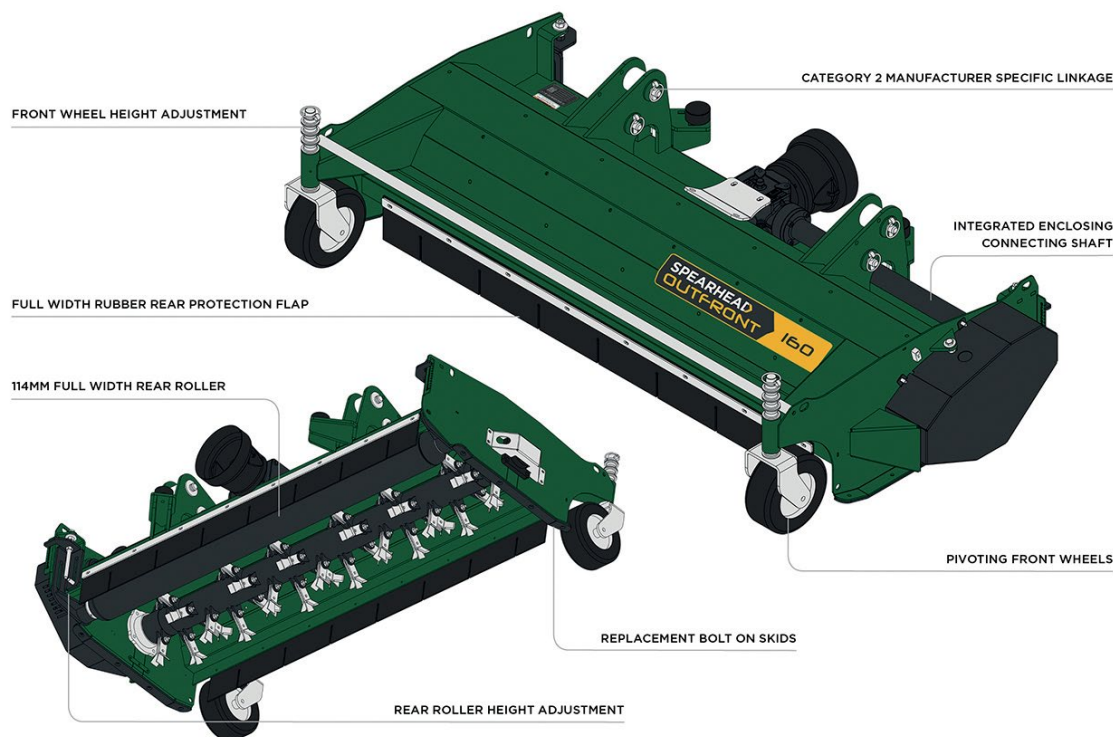

Model	Working Width	Weight	HP	PTO rpm	Flails	Cutting Height	RRP ex GST	RRP incl GST
Outfront 160	1.6m (5'3")	250 kg	15-45	2000	50	20-100 mm	\$11,500	\$12,650



Photos may contain optional extras. All prices are ex-works (Oakey Qld). Prices and specifications may change without notice.

MJ71 SWIFT SERIES FINISHING MOWERS

RIGID DECK, THREE POINT LINKAGE

The MAJOR Swift MJ70-190 and 240 are rigid deck mowers designed for everyday use where a durable, reliable mower is required. This is a low maintenance mower that delivers a professional cylinder mower finish every time.

It is quick and easy to attach to the tractor to increase mowing times. The simple height adjustment can be selected from 10 mm to 130 mm to suit the working conditions, making this a really versatile mower.

Strenx™ 700 MC high-strength steel is used to manufacture this mower.

- Quick height adjustment system.
- Gear driven driveline, eliminates the problems associated with belt driven mowers.
- Internal roller bearings give total protection against moisture and soil.
- Full width rollers allow the machine to follow the ground contours perfectly to give a professional striped finish.
- All Swift mowers go through a rigorous shot blasting process before painting, for long life painted finish.
- Wash down hose feature (applies to all Swift mowers).
- Optional scraper bar (applies to all Swift mowers).

Model	Working Width	Weight	HP (Min.)	PTO rpm	Rotors	Cutting Height	RRP ex GST	RRP incl GST
MJ71-190	1.9m (6'3")	475 kg	25-70	540	3	10-130 mm	\$16,990	\$18,689
MJ71-240	2.4m (8')	560 kg	30-80	540	4	10-130 mm	\$20,950	\$23,045



MJ71 SWIFT SERIES FINISHING MOWERS

WINGED, THREE POINT LINKAGE

The MAJOR winged 3 point linkage Swift roller mowers are high-output machines, suitable for the maintenance of parks, schools and sports grounds. The high blade tip speeds of 90 m/s give a perfect professional striped finish every time.

The wings fold neatly behind the tractor for safe transportation and allows entrance to sites where access is an issue.

- Walterscheid PTO driveshafts fitted as standard.
- Wing lock for safe road transportation.
- Sits tight behind the tractor making towing easy and allows tighter turning circles.
- Two blade systems in one: a simple adjustment converts your blade from rigid blade to swinging blade.
- Strenx™ 700 MC high-strength steel is used to manufacture this mower. The overall weight of the machine is lighter than equivalent width mowers on the market, without compromising on build quality.
- LED road lighting kit.

Model	Working Width	Weight	HP (Min.)	PTO rpm	Rotors	Cutting Height	RRP ex GST	RRP incl GST
MJ71-340	3.4 m (11'2")	940kg	40-90	540	5	10-130 mm	\$43,900	\$48,290
MJ71-400	4.0 m (13'1")	1130 kg	50-100	540	6	10-130 mm	\$49,900	\$54,890
MJ71-540	5.4 m (17'7")	1310 kg	70-120	540	8	10-130 mm	\$69,950	\$76,945



Photos may contain optional extras. All prices are ex-works (Oakey Qld). Prices and specifications may change without notice.

MJ71 SWIFT SERIES FRONT MOUNT FINISHING MOWERS

RIGID AND WINGED, FRONT MOUNTED

The MAJOR Swift front mounted range offers a rigid and winged version. These mowers are suitable for mowing in a variety of locations including military bases, airfields and race courses.

There is 100% overview from the tractor cab making these mowers a great option where visibility is an issue.

The MAJOR front mounted mowers can be used in conjunction with the rear mounted roller mowers for increased mowing capacity or for single pass operation.

- No wheel markings.
- Gear driven driveline, eliminates the problems associated with belt driven mowers.
- Internal roller bearings give total protection against moisture and soil.
- Full width rear roller ease of operation and to allow the machine to follow ground contours.
- 6 PLY tyre on the castor wheel for extra durability.

Model	Working Width	Weight	HP (Min.)	PTO rpm	Rotors	Cutting Height	RRP ex GST	RRP incl GST
MJ70-190F	1.9m (6'3")	455kg	25-70	1000	3	10-130mm	\$21,250	\$23,375
MJ71-240F	2.4m (8')	558kg	30-80	1000	4	10-130mm	\$24,975	\$27,473
MJ71-340F	3.4m (11'2")	905kg	40-90	1000	5	10-130mm	\$42,500	\$46,750
MJ71-400F	4.0m (13'1")	1100kg	50-100	1000	6	10-130mm	\$58,500	\$64,350



MJ71 SWIFT SERIES TRAILED FINISHING MOWERS

WINGED, TRAILED

The MAJOR Swift Trailed roller mower boasts all the features and benefits of the MAJOR 3 point linkage winged version, but with a trailed configuration. This mower is ideal for contractors, turf farms, local authority use and any customer with significant travelling between sites.

High specification LED road lighting is supplied as standard for safe road transportation. To ensure legality of your mower whilst using public highways, brakes are fitted as standard unlike similar mowers on the market. These mowers can be lifted up whilst travelling to avoid kerbs or other obstacles, without having to stop the tractor.

- LED road lighting kit.
- Kerb lift.
- Walterscheid wide angle PTO driveshaft supplied as standard.
- Gear driven: mows in a variety of grass lengths.

Model	Working Width	Weight	HP (Min.)	PTO rpm	Rotors	Cutting Height	RRP ex GST	RRP incl GST
MJ71-400T	4.0m (13'1")	1100kg	50-100	540	6	10-130mm	\$66,350	\$72,985
MJ71-540T	5.40m (17'9")	1270kg	70-120	540	8	10-130mm	\$81,650	\$89,815
MJ71-600T	6.00m (20')	2025kg	90-130	1000	9	10-130mm	\$97,350	\$107,085
MJ71-730T	7.30m (24')	2270kg	105-150	1000	11	10-130mm	\$99,975	\$109,973




MR-SERIES FINISHING MOWERS

The MAJOR Finishing Mower is suitable for cutting in large lawns, estates, parks, golf courses and municipal maintenance.

It is easily connected to the tractors' 3 point linkage to have the machine ready for operation in minutes.

- Overlapping blades.
- Adjustable working depth.
- Two belt transmission with tensioner.
- Four pivoting rubber wheels.
- Maintenance points are positioned to the top of the machine for operator safety.

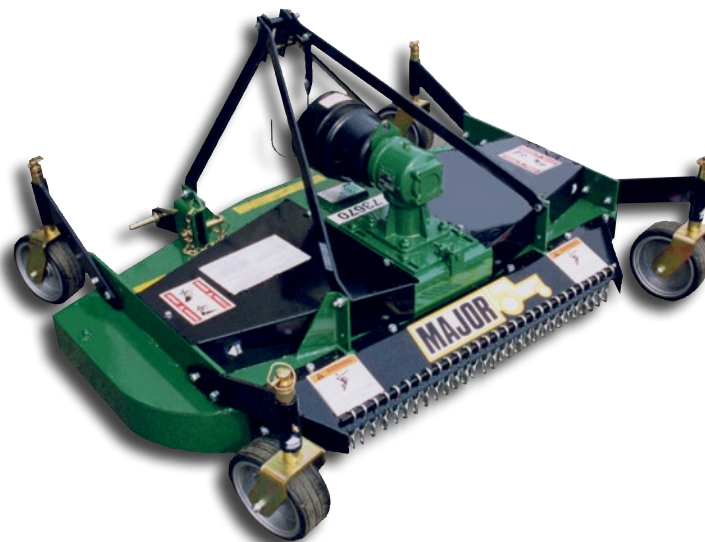

Model	Working Width	Weight	HP (Min.)	PTO rpm	Cutting Height	RRP ex GST	RRP incl GST
MR150	1.5 m (5')	210 kg	15-60	540	20-100 mm	\$6,690	\$7,359
MR180	1.83 m (6')	245 kg	20-75	540	20-100 mm	\$7,250	\$7,975
MR235	2.35 m (8')	310 kg	30-100	540	20-100 mm	\$9,250	\$10,175



Photos may contain optional extras. All prices are ex-works (Oakey Qld). Prices and specifications may change without notice.

CONTOURA MULTI-DECK FINISHING MOWERS

The Major Contoura Mower is a durable and versatile solution for the maintenance of challenging and undulating terrains. The robust frame coupled with the three mowing decks, allow the machine to glide over ground contours, to give a consistent and unrivalled quality-of-cut.

This mower gives efficient mowing, even on dense grass. The cutting height can easily be adjusted from 10 - 110mm making it ideal for fairway and rough turf maintenance and delivers professional turf striping every time. Strenx™ 700 MC high-strength steel is used to manufacture this mower.

- Unique pivoting frame with self-aligning spherical bearings, allow the mowing decks to follow the ground contours with ease.
- Kerb lift: the mowing decks can be raised off the ground to avoid obstacles, without disengaging the PTO.
- Zero turn capability allows tight turns or mowing around obstacles without turf damage.
- Full width rollers follow undulations to give a consistent cut, in both hilly and less challenging terrains.
- Gear driven driveline, eliminates the problems associated with belt driven mowers.
- Internal roller bearings give total protection against moisture and soil.
- Two blade systems in one: a simple adjustment converts your blade from rigid blade to swinging blade.

Model	Working Width	Weight	HP (Min.)	PTO rpm	Rotors	Cutting Height	RRP ex GST	RRP incl GST
MJ76-360	3.67m (12')	1395kg	45-75	540	6	10-110mm	\$71,900	\$79,090



CENTRE MOUNTED TOPPER SERIES

THREE POINT LINKAGE

- Heavy duty transmission.
- Rubber shock absorbers between rotor gearboxes.
- Low maintenance - no belts or pulleys.
- Twin-Cut swinging blade system.

The MAJOR Centre Mounted Topper is a fully gear driven machine fitted with high speed rotors and twin cut swinging blades.

The 909HD Topper is a heavy duty topper featuring galvanised deck, extra heavy duty gearbox and is standard with twin wheels.

A shearbolt PTO shaft is supplied as standard for best power transfer.



Model	Working Width	Weight	HP (Min.)	PTO rpm	Rotors	Cutting Height	RRP ex GST	RRP incl GST
909HD	2.7 m (9')	640 kg	50-120	1000	2	50-250 mm	\$18,250	\$20,075

FLEX WING TOPPER SERIES

- Robust pivot points.
- Rubber shock absorbers.
- Slip clutch PTO protection.
- Hydraulic wing lift.
- ProCut swinging blades.
- 88 mm (3½") blade overlap to eliminate striping.

The MAJOR Flex Wing Topper is a three point linkage mounted machine which folds up to 2.3 m (7' 6") transport width. Like all MAJOR machines, the Flex Wing Topper is of robust construction. CE conformity is achieved through full PTO guarding and heavy rubber skirting to prevent debris from escaping.

The wing cutting decks are raised by hydraulic control to transport position. The wings are capable of flexing from -15 to +25 degrees allowing the cutting unit to follow the ground contours.

Contra-rotating swinging blades are retained in hardened steel bushings and clamped by sprung steel blade backs. Under-sole discs are fitted to prevent scalping and ensure a perfect finish every time.



Model	Working Width	Weight	HP (Min.)	PTO rpm	Rotors	Cutting Height	RRP ex GST	RRP incl GST
MJ38-540	5.4 m (18')	1395 kg	60-160	1000	6	50-250 mm	\$44,750	\$49,225

SLOPETRAK S300

RADIO CONTROL MOWERS

The Twose SlopeTrak S300 from delivers outstanding performance and mowing efficiency. Featuring a new and powerful Vanguard 28hp engine, low fuel consumption and low emissions, and a hybrid electric drive, this machine delivers smooth operation every time.

The Twose SlopeTrak S300 has low ground pressure creating minimal surface disturbance during operation. The low centre of gravity and wide track widths offer maximum stability and optimum handling whilst working on slopes up to 55°.

Operation of the Slope Trak S300 is made effortless with the fully proportional remote control with a range of 150m and offering precise control and variable speed along with full control of the cutting deck functions including engaging and disengaging and height adjustment.

Some of the other great features include fast-stop rotors (cuts out in 3 seconds), fully enclosed body panels keep grass and debris out, GPS enabled offering the ultimate in mowing efficiency - maximum productivity, improved safety and more efficient working.

Model	Product Code	Cutting Width	Cutting Height	Rotors	Weight	Height	Length	RRP ex GST	RRP incl GST
Slopetrak S300	4030510	1.1 m	25mm - 180mm	2	480Kg	765mm - 915mm	1510mm	\$68,750	\$75,625



SLOPETRAK 500 RADIO CONTROL MOWERS

Overview

Designed especially for tackling tough terrain, the ROBOCUT T500 features a low centre of gravity design and durable rubber tracks that make it an outstanding all-terrain mowing machine, capable of mastering slopes up to 55 degrees whilst enhancing operator safety by removing them from the danger zone.

Power comes from a 48hp, three-cylinder, Perkins diesel engine that uses a DPF filter system to ensure it meets the latest Stage V emissions regulations without the need for Adblue.

KEY FEATURES

- Proven Perkins engine technology - Stage V compliant
- Twin roll-over protection bars
- Fully enclosed, all-metal panels
- Responsive remote control unit with 150m working range
- Innovative low centre-of-gravity design
- Robust build quality

Model	Product Code	Cutting Width	Cutting Height	RRP ex GST	RRP incl GST
Slopetrak 500	4050401	1.3m	20-85 mm	\$117,500	\$129,250



OSM-VERGE MOWERS

The Major Offset Mower is designed for intensive cutting requiring agility and durability. The hydraulic headstock offers 140 degrees of movement for cutting verges, ditches, embankments, as well as shrubs, hedges and trees. The 1.56m offset mode suits mowing around fences, buildings and under trees.

The rotary blade system delivers precision cutting and dispersion of material, while offering maximum protection against breakage and driveline damage. Heavy duty gearbox with shock absorbers safeguard the machine in the event of a collision. Full length roller follows ground contours to give a perfect finish.

Available in 1.4m and 2.19m working widths, the Offset Mower is made of high-performance Strenx™ steel and galvanised for the ultimate protection against corrosion.

- Internal double roller bearing housing to protect the bearings while cutting
- Adjustable hydraulic arm from 95° to -35°
- Support wheel supplied as standard
- Rubber skirting to protect against flying debris
- Produced using high-performance Strenx™ 700 MC steel and galvanised.
- Unique blade system for extreme cutting
- Simple height adjustment from 15-100mm.
- Heavy duty gearboxes with inter gearbox shock loading protection
- Available in left or right-hand configurations

Model	Working Width	Sliding Offset	Weight	HP	Rotors	RRP ex GST	RRP incl GST
MJ36-140	1.43m (4' 8.5")	1.56m	690kg	70-120	2	\$34,500	\$37,950
MJ36-210	2.11m (6' 11")	1.56m	810kg	90-150	3	\$37,990	\$41,789



TWOSE 5 – SERIES POWER ARM REACHMOWERS

The 5 – Series Twose Power Arms are designed to deliver performance, value and durability.

Offering a choice of reach from 6.0m to 6.7m making the 5 – Series an ideal fit for contractors and local government. The 5-series has the reach and power to tackle extensive verge-mowing and hedge-cutting duties.

The 5- Series is built to last from super-strong Domex steel, 5-series machines are extremely robust and feature such enhancements as SoftStart rotor engagement, hydraulic safety breakaway, and a cushioned top link for increased longevity.

KEY FEATURES:

- Slide-mount flailhead
- 240° head rotation
- Dual direction cutting
- Hydraulic slew
- Hydraulic breakaway protection
- 200 litre oil tank capacity
- Cast iron pumps and motor
- Angle float
- Road lighting
- Lift float
- Axle mounting (optional)
- Oil cooler kit

CONTROLS

- Proportional electric controls (EPP)

FLAILHEADS

- 1.2m sliding mount belt-drive flailhead

TRACTOR REQUIREMENTS


- From 70hp, 3000kg

SPECIFICATION

- 6.0m & 6.7m reach
- 3-point linkage
- 65hp hydraulics

ARM SETS

- Standard 6.0m
- Parallel arm geometry (both models)
- Telescopic 6.7m

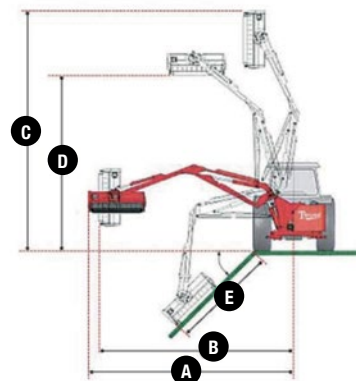

	TW 60-5	TW 67T-5
A	6.0 m (19'6")	6.7m (21'8")
B	5.7 m (18'7")	6.4 m (20'9")
C	6.9 m (22'6")	7.5 m (24'6")
D	5.2 m (17')	5.8 m (19')
E	3.8 m (12'4")	4.5 m (14'7")

Model	Max. Reach	Weight	HP (Min.)	Tractor Weight Req.	RRP ex GST	RRP incl GST
TW60-5 6m power reach arm only	6.0 m (19'6")	1482 kg	65	3000 kg	\$58,965	\$64,862
TW67T-5 6.7m power reach arm only	6.7 m (21'9")	1611 kg	65	3000 kg	\$71,585	\$78,744
7354942BL 1.2M Flail Head to suit TW60-5 and TW67T-5					\$13,335	\$14,669



Photos may contain optional extras. All prices are ex-works (Oakey Qld). Prices and specifications may change without notice.

LIFESTYLE® SERIES POST HOLE DIGGERS

FOR 18-35 HP TRACTORS

- 65 mm x 65 mm RHS constructor.
- Standard with 1 x 12" auger.
- Friction clutch gearbox protection.
- Choice of adjustable holes for easy installation.

Optional augers shown on bottom of page.



Model	Weight	Gearbox Rating	Finish	RRP ex GST	RRP inc GST
LPD18-900	80 kg	20 HP	Green/Red	\$2,990	\$3,289

LIFESTYLE® SERIES POST HOLE DIGGERS

FOR 18-75 HP TRACTORS

- Strong heavy wall 100 mm x 100 mm RHS construction.
- Friction clutch.
- Double cut augers standard.
- Choice of adjustable holes for easy installation.

Augers not included please refer to bottom of page.



Model	Weight	Gearbox Rating	Finish	RRP ex GST	RRP inc GST
HPD20-900	140 kg	20 HP	Green/Red	\$2,995	\$3,295
HPD50-900	170 kg	50 HP	Green/Red	\$3,395	\$3,735
HPD75-900	190 kg	75 HP	Green/Red	\$3,875	\$4,263

AUGERS - DOUBLE CUT

Model	Diameter	RRP ex GST	RRP inc GST
AR100	100 mm (4")	\$490	\$539
AR150	150 mm (6")	\$550	\$605
AR230	230 mm (9")	\$595	\$655
AR300	300 mm (12")	\$610	\$671
AR380	380 mm (15")	\$725	\$798
AR460	460 mm (18")	\$795	\$875
AR610	610 mm (24")	\$1,230	\$1,353

REBEL SERIES TILLERS

- Homeowner or commercial gardening.
- Landscaping or soil conditioning.
- Orchard or vineyard clean-up.

Benefits include:

- All sizes available in either standard or reverse rotation.
- Designed for use on 25 - 65 PTO horsepower tractors.
- Six hardened "L" blades per rotor flange.
- Cast iron gearbox housing.
- Front to rear hitch points are continuously welded to mainframe.
- Metal debris deflector (on Reverse model only).
- CAT 1 Standard and QH (1.5m & 1.8m models), CAT 1 & 2 Standard and QH (2m model).
- Slip clutch driveline protection is standard.
- 13 mm steel end plates.
- Strong "all gear" drivetrain featuring double lip seals on each end of the rotor shaft.



Model	Cutting Width	Weight	HP	Finish	RRP ex GST	RRP inc GST
REB48	1.2m	170 kg	15/25	Painted	\$4,370	\$4,807
REB60	1.5m	305 kg	25/45	Painted	\$4,550	\$5,005
REB72	1.8m	340 kg	35/55	Painted	\$4,995	\$5,495
REB84	2.0m	370 kg	45/65	Painted	\$5,995	\$6,595

3PL COMPACT DISC HARROWS

100 Series Cat 1

- 18" disc with 7½" disc spacing.
 - 2" square tube frame.
 - 35 horse power range.
 - 1" square high carbon gang axles.
- Sealed, self-aligning ball bearings.
- Front gang adjust to 0°, 7°, 14°, 21° with adjustment handle.
- Rear gang adjust to 7°, 14°, 21° with adjustment handle.



Model	Working Width	Weight (approx)	HP (Min.)	No. Discs	Finish	RRP ex GST	RRP inc GST
100-3-01	1.5m	230 kg	35	16	Red Powder Coat	\$4,495	\$4,945
100-3-03	1.5m	230 kg	35	16	Green Powder Coat	\$4,495	\$4,945
100-8-01	1.98m	315 kg	35	16	Red Powder Coat	\$4,795	\$5,275
100-8-03	1.98m	315 kg	35	16	Green Powder Coat	\$4,795	\$5,275
200-6-01	1.98m	333 kg	65	16	Red Powder Coat	\$6,595	\$7,255
200-6-03	1.98m	333 kg	65	16	Green Powder Coat	\$6,595	\$7,255

20 SERIES GRADER BLADES

- Category 0 & 1 heavy duty Quick Hitch compatible A-frame.
- Five forward angles and 3 reverse angles.
- ¼" moldboard available in 4 and 5 ft.
- The 20 series gives small tractor owners a high quality blade for landscaping, levelling, backfilling and grading.



Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
CRB48-01	1.2m	62 kg	20	Red Powder Coat	\$1,295	\$1,425
CRB48-03	1.2m	62 kg	20	Green Powder Coat	\$1,295	\$1,425
CRB60-01	1.5m	68 kg	20	Red Powder Coat	\$1,395	\$1,425
CRB60-03	1.5m	68 kg	20	Green Powder Coat	\$1,395	\$1,425

35 SERIES GRADER BLADES

- Multiple adjustment settings.
- Replaceable cutting edges.
- 5' & 6' moldboard widths.
- Optional skid shoes.
- Manual angle and tilt.



Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
3505-01	1.5m	127 kg	35	Red Powder Coat	\$2,195	\$2,415
3505-03	1.5m	127 kg	35	Green Powder Coat	\$2,195	\$2,415
3506-01	1.8m	140 kg	35	Red Powder Coat	\$2,375	\$2,613
3506-03	1.8m	140 kg	35	Green Powder Coat	\$2,375	\$2,613

50 SERIES GRADER BLADES

- Multiple adjustment settings.
- Replaceable cutting edges.
- 6' and 7' moldboard widths.
- Optional skid shoes.
- Manual angle, tilt and offset.



Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
5006-01	1.8 m	183 kg	50	Red Powder Coat	\$3,175	\$3,493
5006-03	1.8 m	183 kg	50	Green Powder Coat	\$3,175	\$3,493
5007-01	2.1 m	195 kg	50	Red Powder Coat	\$3,395	\$3,735
5007-03	2.1 m	195 kg	50	Green Powder Coat	\$3,395	\$3,735

91 SERIES GRADER BLADES


- Heavy-duty 3-point and Quick Hitches.
- Solid-steel kingpins.
- ½" x 6" replaceable cutting edge.
- Maximum tractor size 90 HP



Model	Working Width	Weight	HP (Max)	Finish	RRP ex GST	RRP inc GST
9107-01	2.1 m	370 kg	90	Red Powder Coat	\$10,850	\$11,935
9107-03	2.1 m	370 kg	90	Green Powder Coat	\$10,850	\$11,935
9108-01	2.4 m	380 kg	90	Red Powder Coat	\$10,990	\$12,089
9108-03	2.4 m	380 kg	90	Green Powder Coat	\$10,990	\$12,089

70 SERIES GRADER BLADES

- Multiple adjustment settings.
- Replaceable cutting edges.
- 7' and 8' moldboard widths.
- Optional skid shoes.
- Manual offset, angle and tilt.

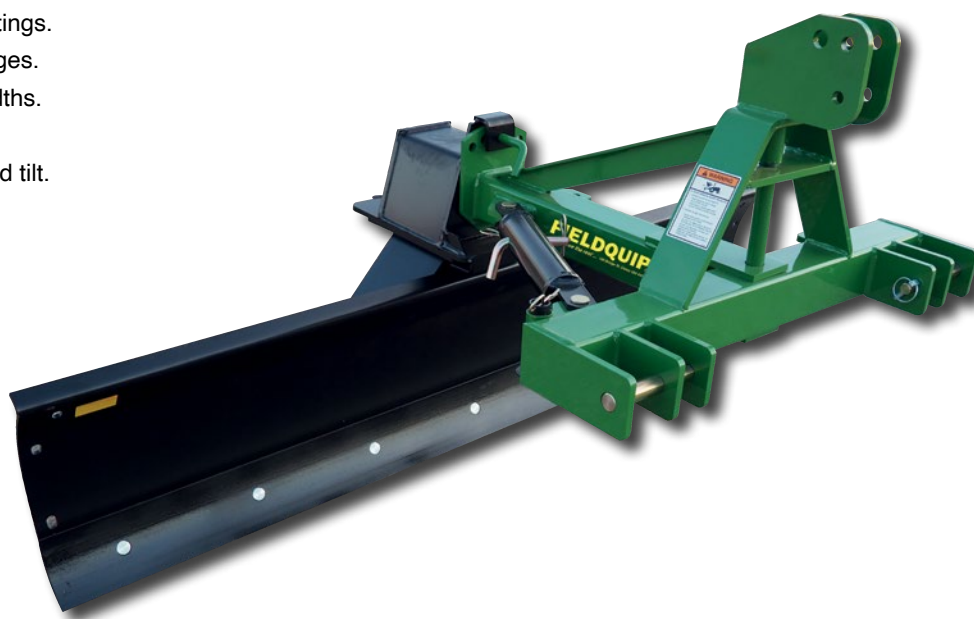

Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
7007-01	2.1 m	244 kg	70	Red Powder Coat	\$4,575	\$5,033
7007-03	2.1 m	244 kg	70	Green Powder Coat	\$4,575	\$5,033

CARRY ALL

- Strong, innovative and stylish.
- High quality two pack finish.
- Heavy wall RHS frame.
- Steel floor.
- Available in red or green. Other colours available on request.
- Load capacity 500 kg.



Tray size:

1200mm x 650mm

1800mm x 830mm

Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
CRA12-900	1.2m (48")	65 kg	20-40	Green/Red	\$1,295	\$1,425
CRA18-900	1.8m (72")	80 kg	20-50	Green/Red	\$1,430	\$1,573

FEL PALLET FORKS

- High load guard
- Pin Eye style fork attachment
- Australian Made
- Independently moving tines
- Ideal for undulating surfaces
- Available with Euro or John Deere hitch



Model	Capacity	Weight	Attachment	Finish	RRP ex GST	RRP inc GST
PF1600AG-E	1,600 kg @ 600mm	140 kg	Euro	Black Powder Coat	\$2,495	\$2,855
PF1600AG-JD	1,600 kg @ 600mm	140 kg	John Deere	Black Powder Coat	\$2,495	\$2,855

SINGLE TYNE RIPPER

- Solid steel main billet 100 mm x 25 mm.
- CAT I hook up.
- Medium tensile ripper point welded to main billet.
- 300 mm ripping depth.



LIGHT DUTY - SUITED FOR 18-40HP TRACTORS

Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
LSR-900	0.1 m x .025 m 0.4 m depth	40 kg	18	Green/Red	\$785	\$864

SINGLE TYNE RIPPER & PIPELAYER



- Solid steel main billet 150 mm x 32 mm.
- CAT I & II.
- Heat treated replaceable and reversible chisel point.
- 600 mm ripping depth.
- Heavy RHS cross bar 100 mm x 100 mm x 6 mm.



FITTED WITH
OPTIONAL
PIPELAYER

HEAVY DUTY - SUITED FOR 35-85HP TRACTORS


Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
STR500	0.15 m x .032 m 0.6 m depth	60 kg	35	Green/Red	\$955	\$1,051

HEAVY DUTY - PIPELAYER (SUITS STR150)

Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
PLY500 suits STR500	0.07 m opening	20 kg	35	Green/Red	\$690	\$759

LANDSCAPE RAKES

- Forward or reverse working direction.
- 5/16" x 1" rake.
- Individual rake teeth for easy repair.
- 1 1/4" kingpin.

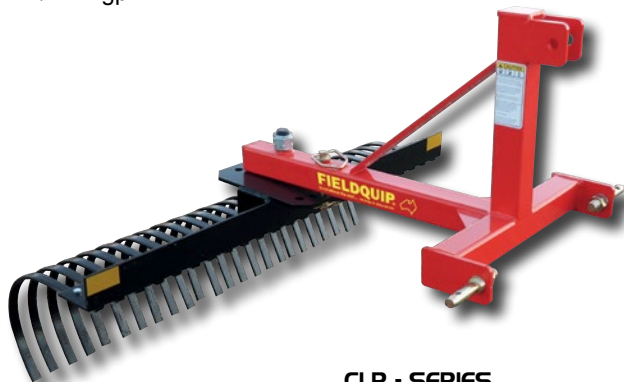

CLR - SERIES



Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
CLR60-01	1.5 m	65 kg	24	Red Powder Coat	\$1,850	\$2,035
CLR60-03	1.5 m	65 kg	24	Green Powder Coat	\$1,850	\$2,035
LLR72-01	1.8 m	94 kg	40	Red Powder Coat	\$2,320	\$2,552
LLR72-03	1.8 m	94 kg	40	Green Powder Coat	\$2,320	\$2,552
LLR84-01	2.1 m	102 kg	40	Red Powder Coat	\$2,770	\$3,047
LLR84-03	2.1 m	102 kg	40	Green Powder Coat	\$2,770	\$3,047

Photos may contain optional extras. All prices are ex-works (Oakey Qld). Prices and specifications may change without notice.

BOX BLADES

Box Blades are ideal tool for finish grading, levelling and backfilling.

- 17 - 40HP tractors.
- Cat 1 hookup with replaceable and reversable cutting edge.
- Manually retractable and height adjustable rippers.



Model	Working Width	Weight	HP (Rec.)	Finish	RRP ex GST	RRP inc GST
BBX48-01	1.2m	118 kg	35	Red Powder Coat	\$1,635	\$1,799
BBX48-03	1.2m	118 kg	35	Green Powder Coat	\$1,635	\$1,799
BBX60-01	1.5m	148 kg	35	Red Powder Coat	\$1,825	\$2,008
BBX60-03	1.5m	148 kg	35	Green Powder Coat	\$1,825	\$2,008
BBX72-01	1.8m	176 kg	35	Red Powder Coat	\$2,075	\$2,283
BBX72-03	1.8m	176 kg	35	Green Powder Coat	\$2,075	\$2,283

TILLAGE SERIES

3 TYNE RIPPER

- Rugged construction.
- Three (3) 225 mm (9") reversible points.
- 150 x 32 tynes with chamfered edge.
- Category 2 linkage.
- Rips to 0.6 metre.
- Suits tractors up to 90HP.
- Adjustable tyne height.




Model	Width	Weight	HP (Rec.)	RRP ex GST	RRP inc GST
TTR500	0.15 m x 32 Tynes 0.6m depth	160 kg	40-90	\$2,935	\$3,229

3PL BALE SPEAR CAT I & 2



Model	Capacity	Weight	HP (Min.)	Finish	RRP ex GST	RRP inc GST
3PBS-2	1,000 kg	44 kg	25	Black Powder Coat	\$850	\$935

FEL DOUBLE BALE SPEAR

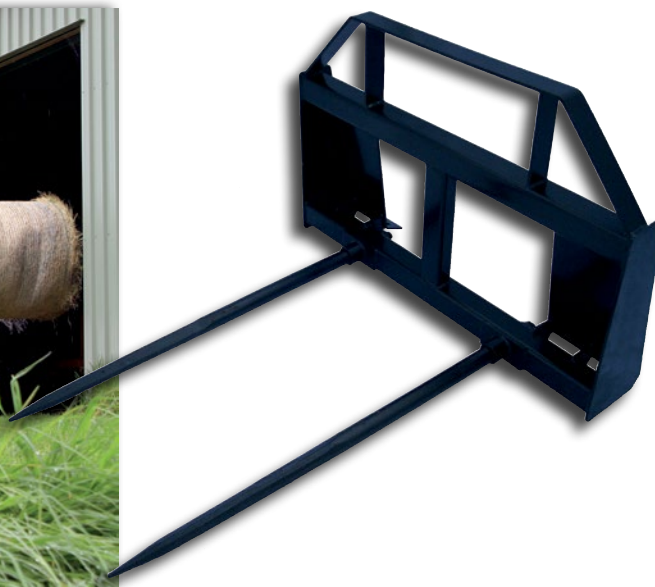

Model	Capacity	Weight	Attachment	Finish	RRP ex GST	RRP inc GST
BS2E	1,500 kg @ 600 mm	140 kg	Euro	Green/Black Powder Coat	\$1,640	\$1,804
BS2JD	1,500 kg @ 600 mm	140 kg	John Deere QA	Green/Black Powder Coat	\$1,640	\$1,804

Photos may contain optional extras. All prices are ex-works (Oakey Qld). Prices and specifications may change without notice.

FIELDQUIP[®]

AG & TURF



TERMS & CONDITIONS...

1. All prices and specifications are subject to renewal or alteration without prior notification. Dealers must check prices to satisfy themselves before quoting.
2. Prices are in Australian dollars with both GST inclusive and exclusive.
3. Prices exclude freight except where stated otherwise.
4. It is the dealer's responsibility to check availability of stock before quoting any model or machine for resale.
5. Specifications contained in this pricelist are only an outline. Please consult model specific brochures for complete specifications.
6. Exclusive Dealer Marketing Rights may apply to some products in some areas. It is the dealer's responsibility to check this before quoting any goods for resale.
7. Fieldquip reserves the right not to sell any or all the items included in this pricelist to any potential Purchaser or Reseller.
3. The following items are not covered by Fieldquip warranty;
 - (i) Power take-off shafts and clutches,
 - (ii) Blades, tynes, flails, knives, tyres, wheels, belts, bearings, seals etc,
 - (iii) Freight costs;
 - (iv) Loss of income from the machine due to a warranty fault,
 - (v) Use of non genuine parts.
4. Fieldquip will not cover any repairs performed without Fieldquip personnel prior agreement.

WARRANTY PROCEDURE

In the event of a product failure please proceed as follows:



WARRANTY TERMS

1. All Fieldquip machinery is covered by a comprehensive warranty against faulty materials and workmanship provided that:
 - (i) The machine is operated in normal use,
 - (ii) The machine is correctly serviced and maintained,
 - (iii) The machine is worked within its stated capacity (ie. horsepower limit and PTO speed),
 - (iv) The machine is not subjected to any modifications or damage from improper use
 - (v) Fieldquip is in receipt of duly signed pre-delivery and installation certificate and warranty documentation.
2. The term of warranty shall be 12 months from date of installation except machines sold into the Hire Industry, these shall be void of warranty.
5. Phone Fieldquip (07) 4691 1500 and discuss the problem with the customer service team. They will advise how to carry out the repair in the quickest, most effective and efficient way.
6. Advise Fieldquip during this phone call what labour would be involved in the repair work. Fieldquip will authorise the pre-allocated labour allowance for the repair and issue a warranty claim number. No repair is to be commenced without prior authorisation.
7. Fieldquip will post out a warranty claim form. This will specify the allowed labour rate, time allocation and parts to be returned for warranty assessment.
8. Fieldquip will dispatch if needed any parts to carry out the repair work and will invoice and charge the dealer. The faulty parts must be returned for a credit to be raised.
9. Fill out the required forms and return (with faulty parts).
10. Once parts and claim forms are received, parts will be assessed and if the claim is accepted, it will be credited to your account.
11. Claims must be returned within 20 days from date of repair.

NOTE: All photos are for Illustration Purposes only and may be a different model to description.

FIELDQUIP®

AG & TURF

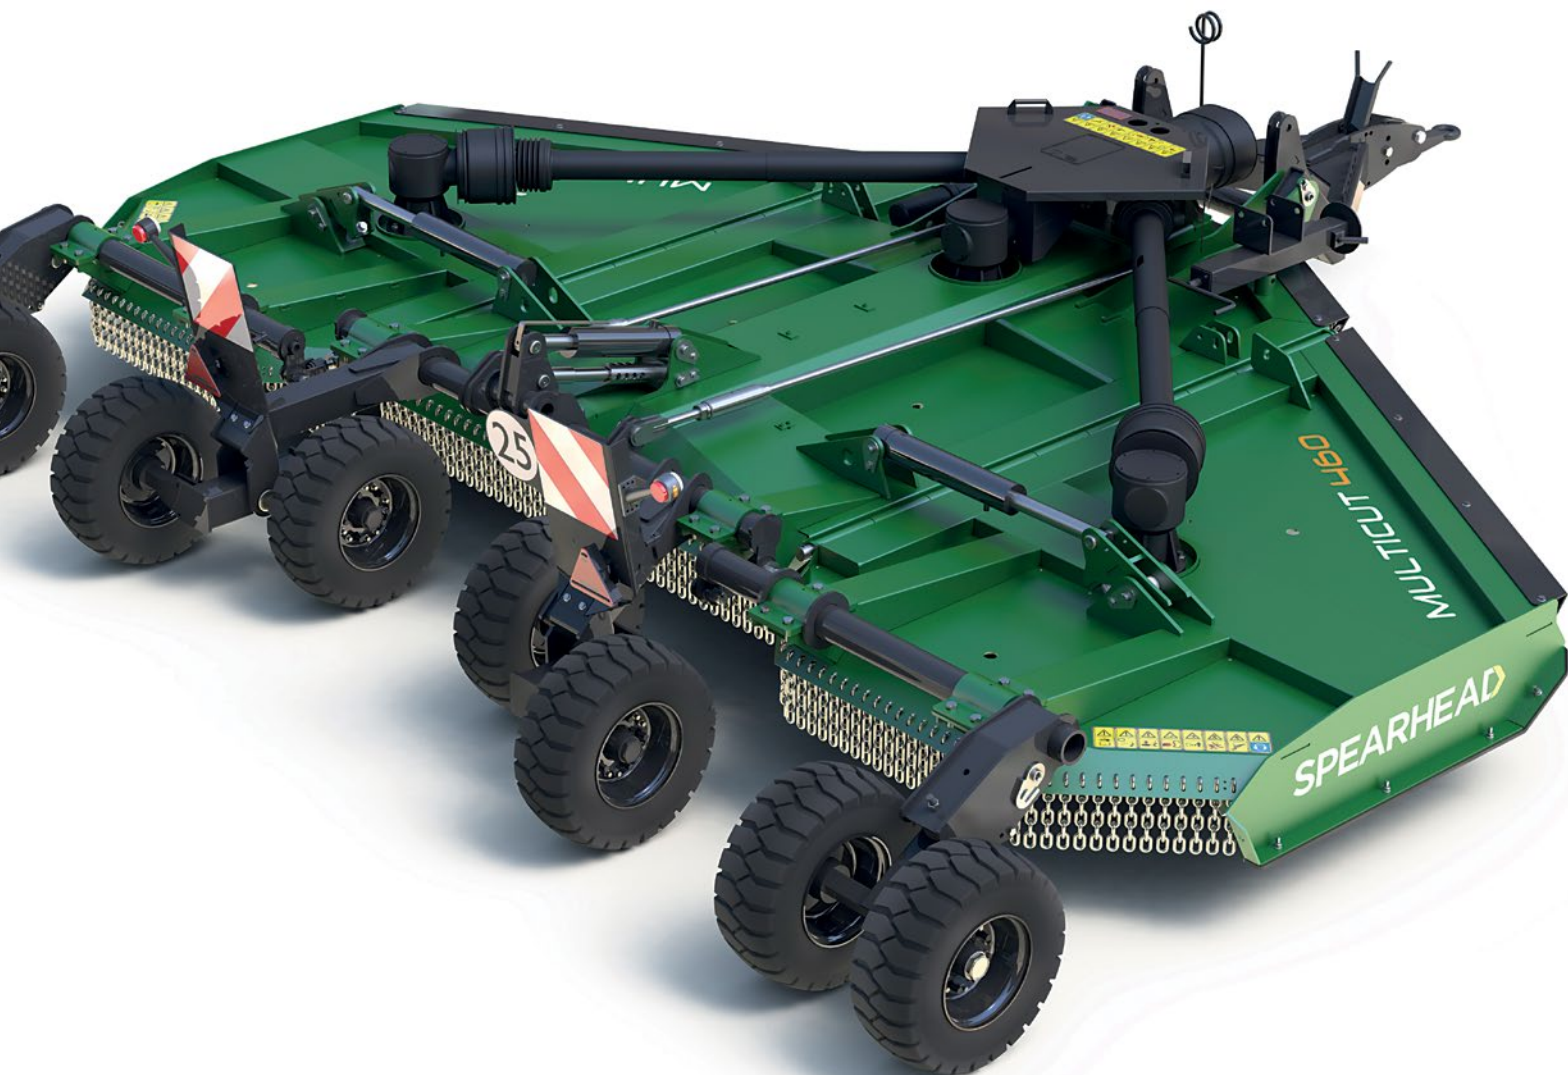

PHONE: 1800 454 150
199 BRIDGE STREET OAKLEY QUEENSLAND AUSTRALIA 4401
www.fieldquip.com.au

Additional lines may be added or deleted from the range in this guide -
visit www.fieldquip.com.au for new models and availability

 **MEMBER OF THE
ALAMO GROUP**
ALWAYS ON THE CUTTING EDGE