
SNIPER OFFSET



CONSTRUCTION



ROTOR DESIGN




FLAIL



HAMMER

OFFSET

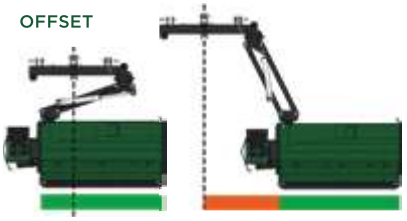

INLINE

OFFSET (1.5M)

The Sniper Offset flail mower is designed for verge and embankment use giving a high quality and consistent cut in material up to 40mm. It is the perfect choice for maintenance of places such as waterways and highways.

The Sniper Offset range is available in a choice of working widths between 1.6 and 2.3 metres with additional operating flexibility through variable parallel offsetting arms up to a maximum of 1.5m to cater to the working environment. In addition, the machine features variable cowl angling to aid the following of ground contours.

This robust machine features heavy-duty hammer flails fitted on an electronically balanced rotor mounted on enclosed, self-aligning bearings. Belt drive gives reliable power transmission and a 140mm full width adjustable, self-cleaning rear roller with scraper and rubber flap will ensure a quality cut and well distributed finish.

	TRACTOR HP	MINIMUM WEIGHT GUIDE	MACHINE WEIGHT	CUTTING WIDTH	HITCH	PTO SPEED	OFFSET DISTANCE	FLAIL TYPE	NUMBER OF FLAILS	CUTTING HEIGHT
SPEARHEAD SNIPER 160 OFFSET	80 - 160hp (60 - 120kW)	5500kg (12125lbs)	680kg (1499lbs)	1.60m (5' 3")	Rear mount only	540rpm	1.46m (4' 9") (hydraulic)	Heavy-duty hammer flail	20	15 - 65mm (9/16" - 2 9/16")
SPEARHEAD SNIPER 190 OFFSET	90 - 160hp (67 - 120kW)	5500kg (12125lbs)	710kg (1565lbs)	1.90m (6' 3")	Rear mount only	540rpm	1.46m (4' 9") (hydraulic)	Heavy-duty hammer flail	24	15 - 65mm (9/16" - 2 9/16")
SPEARHEAD SNIPER 225 OFFSET	100 - 160hp (75 - 120kW)	5500kg (12125lbs)	890kg (1742lbs)	2.25m (7' 5")	Rear mount only	540rpm	1.46m (4' 9") (hydraulic)	Heavy-duty hammer flail	28	15 - 65mm (9/16" - 2 9/16")

Full specification at rear of brochure

*For inspection purposes only and not to opened whilst working. Spearhead Machinery claims no responsibility for accident or incident arising from the opening of the inspection area whilst the machine is in operation.



TRACTOR POWER
From 80hp (60kW)

CUT WIDTH
1.60-2.25m (5'3"-7'5")