

SNIPER HD



CONSTRUCTION

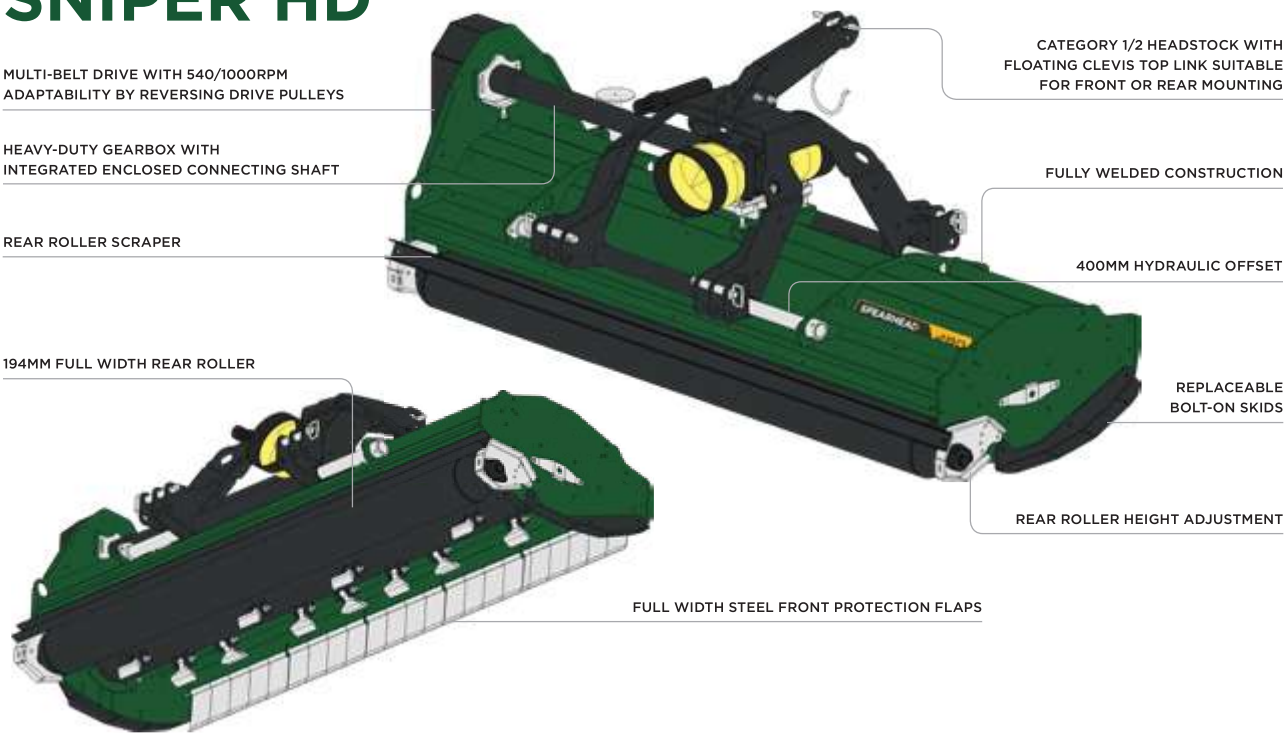

ROTOR DESIGN

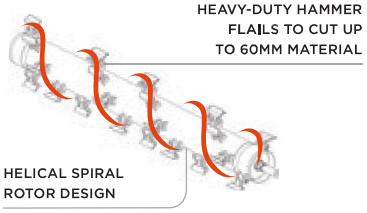


FLAIL



HAMMER

OFFSET

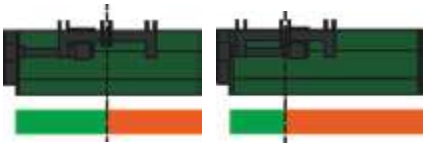

INLINE

OFFSET (400MM)

The Sniper HD flail mower is designed for agricultural and municipal use giving a high quality and consistent cut in material up to 60mm. It is the perfect choice for intense farmers and professional operators such as contractors and local authorities.

This robust machine features heavy-duty hammer flails fitted in a double helical pattern on an electronically balanced rotor mounted on enclosed, self-aligning bearings. Belt drive gives reliable power transmission and a 194mm full width self-cleaning rear roller with scraper and rubber flap will ensure a quality cut and well distributed finish.

The Sniper HD range is available in a choice of working widths between 2.4 and 3.0 metres with operating flexibility offered by a 400mm hydraulic side shift that allows work around trees and other obstructions. The machine can also be front or rear mounted thanks to a reversible headstock.


	TRACTOR HP	MINIMUM WEIGHT GUIDE	MACHINE WEIGHT	CUTTING WIDTH	HITCH	PTO SPEED	OFFSET DISTANCE	FLAIL TYPE	NUMBER OF FLAILS	CUTTING HEIGHT
SPEARHEAD SNIPER 240 HD	80 - 180hp (60 - 135kW)	2900kg (6393lbs)	905kg (1995lbs)	2.40m (7' 10")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	32	35 - 110mm (1 3/8" - 4 5/16")
SPEARHEAD SNIPER 260 HD	90 - 180hp (67 - 135kW)	2900kg (6393lbs)	935kg (2061lbs)	2.60m (8' 6")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	32	35 - 110mm (1 3/8" - 4 5/16")
SPEARHEAD SNIPER 280 HD	90 - 180hp (67 - 135kW)	2900kg (6393lbs)	990kg (2183lbs)	2.80m (9' 2")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	36	35 - 110mm (1 3/8" - 4 5/16")
SPEARHEAD SNIPER 300 HD	100 - 180hp (75 - 135kW)	2900kg (6393lbs)	1025kg (2260lbs)	3.00m (9' 10")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	40	35 - 110mm (1 3/8" - 4 5/16")

Full specification at rear of brochure

TRACTOR POWER
From 80hp (60kW)

CUT WIDTH
2.40-3.00m (7'10"-9'10")

UNIT OPTIONS

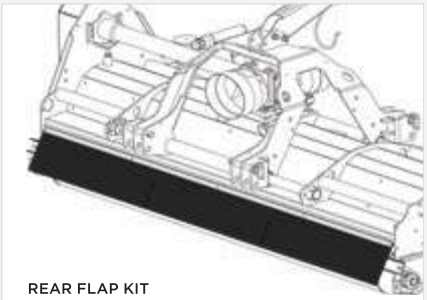

REAR FLAP KIT