

SNIPER SHD



CONSTRUCTION

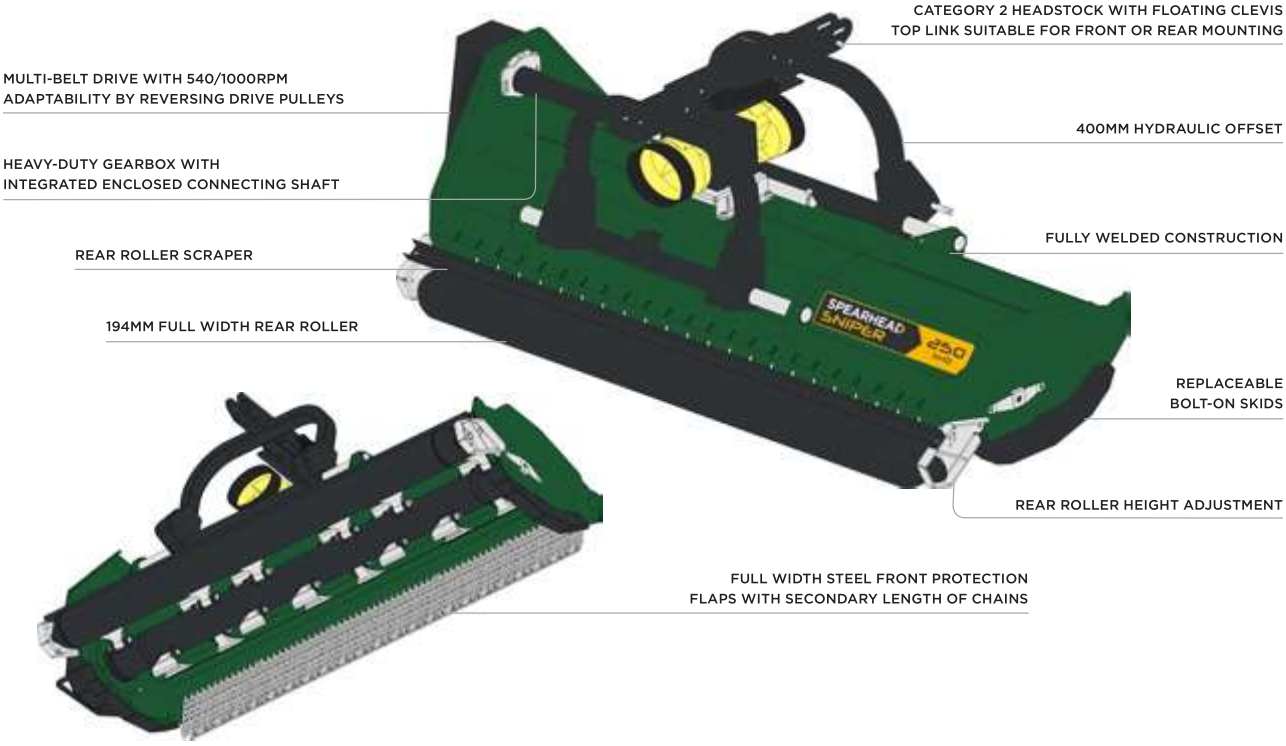

ROTOR DESIGN




FLAIL



HAMMER

OFFSET

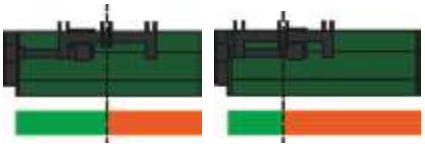

INLINE

OFFSET (400MM)

The Sniper SHD flail mower is designed for agricultural and municipal use giving a high quality and consistent cut in material up to 80mm. It is the perfect choice for intense use farmers and professional operators such as contractors and local authorities.

This highly robust machine features heavy-duty hammer flails fitted on an electronically balanced rotor mounted on enclosed, self-aligning bearings. Belt drive gives reliable power transmission in challenging conditions and a 194mm full width adjustable, self-cleaning rear roller with scraper will ensure a quality cut and well distributed finish; even in the most intense terrain.

The Sniper SHD range is available in a choice of working widths between 2.5 and 2.8 metres with operating flexibility offered by a 400mm hydraulic side shift that allows work around trees and other obstructions. The machine can also be front or rear mounted thanks to a reversible headstock.


	TRACTOR HP	MINIMUM WEIGHT GUIDE	MACHINE WEIGHT	CUTTING WIDTH	HITCH	PTO SPEED	OFFSET DISTANCE	FLAIL TYPE	NUMBER OF FLAILS	CUTTING HEIGHT
SPEARHEAD SNIPER 210 SHD	60-120hp (45-90kW)	5500kg (12125lbs)	1050kg (2315lbs)	2.10m (6' 11")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	23	35 - 123mm (1 3/8" - 4 13/16")
SPEARHEAD SNIPER 250 SHD	70-130hp (52-97kW)	5500kg (12125lbs)	1150kg (2535lbs)	2.50m (8' 2")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	25	35 - 123mm (1 3/8" - 4 13/16")
SPEARHEAD SNIPER 280 SHD	80-130hp (60-97kW)	5500kg (12125lbs)	1230kg (2712lbs)	2.80m (9' 2")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	27	35 - 123mm (1 3/8" - 4 13/16")

Full specification at rear of brochure

TRACTOR POWER
From 60hp (45kW)

CUT WIDTH
2.10-2.80m (6'11"-9'2")

UNIT OPTIONS

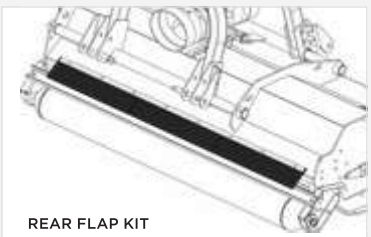

REAR FLAP KIT